



Part of Ant Group Ltd


## ESD Bench Matting - Textured Finish

### Features:

- High quality ESD bench matting
- Reflection breaking surface to reduce glare and improve operator comfort
- Protection against small collisions thanks to natural resilience of rubber
- Prevents sliding of delicate components thanks to excellent friction coefficient
- Heat resistant: rubber does not melt or burn coming into contact with hot metal parts or soldering debris
- Resistant to chemical agents normally used for maintenance
- Oil resistance: this product resists most oils
- Suitable for loose laying: does not require application with adhesive
- Good resistance to scratches
- Excellent flexibility and comfort
- Cut mats available on request
- European origin



### Construction:

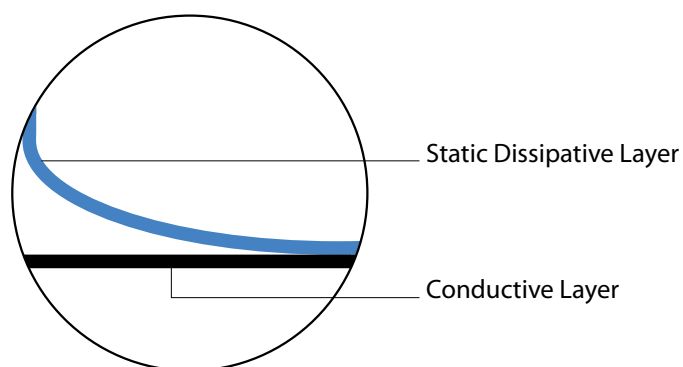

### Colours / Finish:



**Fig 1: Stud Positioning**



### Requesting Cut Mats with Studs:

If ordering pre cut mats and you require studs to be added, please ensure that the position of the stud is specified as per Fig 1.



Part of Ant Group Ltd

## ESD Bench Matting - Textured Finish

### GROUNDING:

Sufficient ground cords should be used to reliably meet EN 61340-5-1 Table 3 less than  $1 \times 10^9$  ohms for working surfaces. Industry recommendation is that continuous runs of ESD matting should be grounded at 10ft intervals to allow proper charge decay rates. Each individual ESD mat should be grounded with ground snaps located no further than five feet from either end.

### CLEANING:

Please note that contact between the matting surface and any acid or alkali solvent is strictly prohibited (such as Benzene, Alcohol etc), this will result in the antistatic performance wearing away. If cleaning is required, the matting may be wiped with a cloth coated in a neutral solution (such as water).

### GUIDANCE ON USE:

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Matting should always be trimmed with a sharp knife or razor blade.

### CUTTING TOLERANCES:

Width  $\pm 6$ mm

Length  $\pm 6$ mm every linear foot of running material

### RoHS COMPLIANCE:

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/EC Article 4.1.



### Test Results:

Details:	Test Standard:	Results:
Material	-	Conductive rubber, static dissipative rubber
Thickness	-	2mm
Width	-	120cm
Length	-	10m per roll
Surface	-	Non-shining
Tester	-	ETS 406C Static Decay Meter, 3M Model 701 Test Kit for Static Control Surfaces
Hardness	ISO 7619	75 $\pm$ 5 shore A
Abrasion Resistance	ISO 4649, method A	$\leq 200$ mm <sup>3</sup>
Indentation	EN433	$\leq 0,20$ mm
Cigarette burning resistance	EN1399	No burn
Chemical resistance	EN423	Resistant to chemical agents normally used for maintenance
Dimensional Stability	EN424 - 6h/80°C	$\leq 0.4\%$
Surface Resistance Top Layer	EN 100015.1-IEC61340	About $10^8\Omega$
Surface Resistance Bottom Layer	EN 100015.1-IEC61340	About $10^5\Omega$



Part of Ant Group Ltd

## ESD Bench Matting - Textured Finish

### Test Results:

Characteristic:	Standard:	Average Results ( $\Omega$ ):
Surface Resistance	IEC 61340-4-1	$1 \times 10^7 / 1 \times 10^9$
EN 100015-1	-	$5 \times 10^6 / 5 \times 10^8$
EOS/ESD S11-11	-	$1 \times 10^7 / 5 \times 10^8$
Volume Resistance	IEC 61340-4-1	$5 \times 10^6 / 1 \times 10^8$
Resistance to Ground	EN 100015-1	$1 \times 10^6 / 1 \times 10^8$
EOS/ESD S11-11	-	$1 \times 10^6 / 1 \times 10^8$
IEC 61340-4-1	-	$5 \times 10^6 / 5 \times 10^7$
Charge Decay	FED TM 101C (5000V-50V)	<0,01sec

### Results after accelerated ageing at 70°C for 12 days:

Characteristic:	Standard:	Average Results ( $\Omega$ ):
Surface Resistance	EOS/ESD S11-11	< $10^9$
EN 100015-1	-	-
Volume Resistance	IEC 61340-4-1	< $5 \times 10^8$
Resistance to Ground	EOS/ESD S11-11	< $10^8$
IEC 61340-4-1	-	< $10^8$
Charge Decay	FED TM 101C (5000V-50V)	<0,02sec

Product Code:	Description:	Size:	Additional Notes:
082-0028	ESD Bench Matting - Textured Finish	1.2m wide / 10m length per roll	Blue
082-0034	ESD Bench Matting - Textured Finish	1.2m wide / 10m length per roll	Grey
082-0030	ESD Bench Matting - Textured Finish	1.2m wide / 10m length per roll	Beige
082-0035	ESD Bench Matting - Textured Finish	1.2m wide / 10m length per roll	Green
082-0024	ESD Bench Matting - Textured Finish	600 x 1200mm	Blue
082-0025	ESD Bench Matting - Textured Finish	600 x 1200mm	Grey
082-0026	ESD Bench Matting - Textured Finish	600 x 1200mm	Beige
082-0027	ESD Bench Matting - Textured Finish	600 x 1200mm	Green
067-0060	Stud - Top Left	10mm stud	Each
067-0061	Stud - Top Right	10mm stud	Each
067-0062	Stud - Bottom Left	10mm stud	Each
067-0063	Stud - Bottom Right	10mm stud	Each
067-0064	Stud - All 4 Corners	10mm stud	Qty 4 Studs