



Part of Ant Group Ltd

Moisture Barrier Bag_ANT018MBB

Features:

- Protects electronics from moisture and static damage
- Opaque and light tight ensuring the inside item can not be seen from outside
- Firm lamination and hot sealing offers superior resistance of vapour and oxygen
- Surface resistance of 10^8 - $10^{11}\Omega$
- Customized printing is available
- Applicable to pack electronic products which are sensitive to moisture and static, such as PC board, IC integrated circuit, CD drivers, HD etc.
- Available in 3.6 / 4.4 and 6.1Mil thicknesses
- Flexible structure & easy to vacuum seal




Additional Notes:

We recommend that all of our moisture barrier bags be used within 2 years from the date of manufacture. Store this product in its original packaging in a climate-controlled environment where temperature ranges from 21°C -23°C and relative humidity is 45 - 50%.

Aluminized Polyester
Dissipative Nylon
Cast Polyethylene

Standard Construction:

Our moisture barrier bags are constructed in 3 layers. The bag features an anti static metallized polyester outer layer and an anti static inner layer. In between are layers of polyethylene, nylon and an aluminium foil shield.

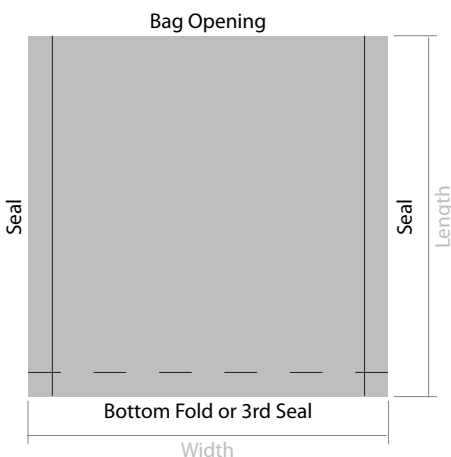

Configuration(s):

Our bags are available in custom sizes or in several industry standard sizes. Bags are offered in a 3-seal configuration, with our standard flexographically printed artwork. Our bags can also be personalised with your company logo on any bespoke orders.

MOISTURE BARRIER BAG
ANT018MBB
THIS BAG IS ROHS COMPLIANT

ATTENTION
THIS BAG CONTAINS
MOISTURE & ELECTROSTATIC
SENSITIVE DEVICES

CONFORMS TO
IPC/JEDEC J-STD-033

Standard Bag Artwork:

Our moisture barrier bags are produced with the following sample artwork as standard. For further information on bespoke/printed orders, please contact one of our sales team. Please note there is a MOQ of 20,000 bags on all printed bags.

Note: All of our moisture barrier bags are batch coded for QC traceability.



Part of Ant Group Ltd

Moisture Barrier Bag_ANT018MBB

Test Conditions:

The following results were taken under the following environmental test conditions:
Temperature: 21.3°C / Humidity: 45.1%



Technical Parameters:

Item:	Test Standard:	Result:
Film Composition	N/A	PET-AL/NY/CPE
Metal Layer Resistance	ASTMD-257	<0.1 Ω
Inner and Outer Resistance	ASTMD-257	10 ⁸ - 10 ¹¹ Ω
EMI Shielding	MIL-B-81705-C	>60db
Static Shielding - Capacitance Probe	EIA541 (Voltage Difference)	<10V
Moisture Vapour Transmission (at 90%RH, 23°C)	ASTMF1249-2005	0.0006 gm/100sq.in/24hrs
Tensile Strength	ASTM D882	MD/TD >24lbs/in
Puncture Resistance	ASTM F1306-90(2002)	Inner to Outer: 54.7N Outer to Inner: 51.3N
Tear Strength	ASTM D1004	MD >3lbs/in TD >3.8lbs/in
Heat Seal Temperature	-	250-375 F
Heat Seal Time	-	0.5-3.5 sec
Heat Seal Pressure	-	30-70 PSI
Seal Strength	GB/96-04-10	>3kg/cm
Contact Corrosivity	FTMS 101C Method 3005	No visible spots detected

Test Conclusion: (Date of Issue: 2009-08-16)

The anti-static moisture barrier bag is tested accordant with the relevant test standard and requirements.

Test Item:	Test Method:	Measured Equipment(s):	MDL:
Lead (Pb)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Cadmium (Cd)	IEC 62321:2008 Ed.1 Sec.8	ICP-OES	2mg/kg
Mercury (Hg)	IEC 62321:2008 Ed.1 Sec.7	ICP-OES	2mg/kg
Hexavalent Chromium (Cr(VI))	IEC 62321:2008 Ed.1 Annex C	UV-Vis	2mg/kg
Polybrominated Biphenyls (PBBs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg
Polybrominated Diphenyl Ethers (PBDEs)	IEC 62321:2008 Ed.1 Annex A	GC-MS	5mg/kg



Part of Ant Group Ltd

Moisture Barrier Bag_ANT018MBB

Product Code:	Description:	Size (inches):	Size (mm):	Additional Notes:
018-0404	Moisture Barrier Bag 3.6Mil / 92 microns	6 x 26	152.4 x 660.4	Pack of 100
018-0001	Moisture Barrier Bag 3.6Mil / 92 microns	6 x 28	152.4 x 711.2	Pack of 100
018-0400	Moisture Barrier Bag 3.6Mil / 92 microns	10 x 20	254 x 508	Pack of 100
018-0401	Moisture Barrier Bag 3.6Mil / 92 microns	10 x 24	254 x 610	Pack of 100
018-0301	Moisture Barrier Bag 3.6Mil / 92 microns	10 x 26	254 x 660.4	Pack of 100
018-0402	Moisture Barrier Bag 3.6Mil / 92 microns	12 x 20	304.8 x 508	Pack of 100
018-0007	Moisture Barrier Bag 3.6Mil / 92 microns	16 x 18	406 x 457	Pack of 100
018-0403	Moisture Barrier Bag 3.6Mil / 92 microns	18 x 18	457 x 457	Pack of 100
018-0300	Moisture Barrier Bag 3.6Mil / 92 microns	22 x 24	558.8 x 609.6	Pack of 100

Note: Other sizes and thicknesses available upon request.